









SILO DE SÉCHAGE POUR GRANULÉS TYPE ST

ST SILO GRANULATE DRYER

Variantes de SILO de séchage de granulés ST

Device alternatives

	ST 120	ST 250	ST 500	ST 750	ST 1000	ST 1500	ST 2000	ST 4000
contenu volume	200 l	400 l	800 l	1200 l	1450 l	2500 l	3000 l	5800 l
charge utile filling weight	120 kg	250 kg	500 kg	750 kg	1000 kg	1500 kg	2000 kg	4000 kg
puissance heat capacity	4,5 kW	6 kW	15 kW	15 kW	18 kW	22,5 kW	30 kW	2 x 30 kW
débit d'air en m³/min air capacity in m ³ /min	2,6	4	25	25	25	40	50	2 x 50
dimensions A	930 x 750 mm	1070 x 800 mm	1350 x 1270 mm	1600 x 1400 mm	2200 x 1700 mm	2250 x 1800 mm	2900 x 2000 mm	2900 x 2000 mm
dimensions B	1850 mm	2050 mm	2100 mm	2250 mm	2250 mm	2400 mm	2600 mm	3350 mm
dimensions C	515 mm	515 mm	350 mm	260 mm	260 mm	260 mm	260 mm	110 mm
dimensions D	500 mm	625 mm	500 mm	1040 mm	1212 mm	1508 mm	1570 mm	1762 mm
dimensions E	260 x 260 mm	385 x 385 mm	dimensions du couvercle et exécutions suivant desiderata lid dimensions and execution as per request					
trappe de vidange drain slide valve			NW 80	NW 80	NW 80	NW 150	NW 150	NW 200
poids weight	235 kg	285 kg	580 kg	620 kg	800 kg	1100 kg	1300 kg	2500 kg
forme de l'enceinte shape of internal chamber								
avec roues with reels	x	x						
sans roues, avec évacuation matière without reels and material extrac port			x	x	x	x	x	x

susceptibles de modifications techniques

subject to technical change



IHNE & TESCH
ELEKTRO-WÄRMETECHNIK

KELLER IHNE + TESCH
ELEKTRO-WÄRMETECHNIK


CELTIC

KIT ELECTROHEAT

www.celtic.fr

SILO DE SÉCHAGE POUR GRANULÉS TYPE ST

ST SILO GRANULATE DRYER

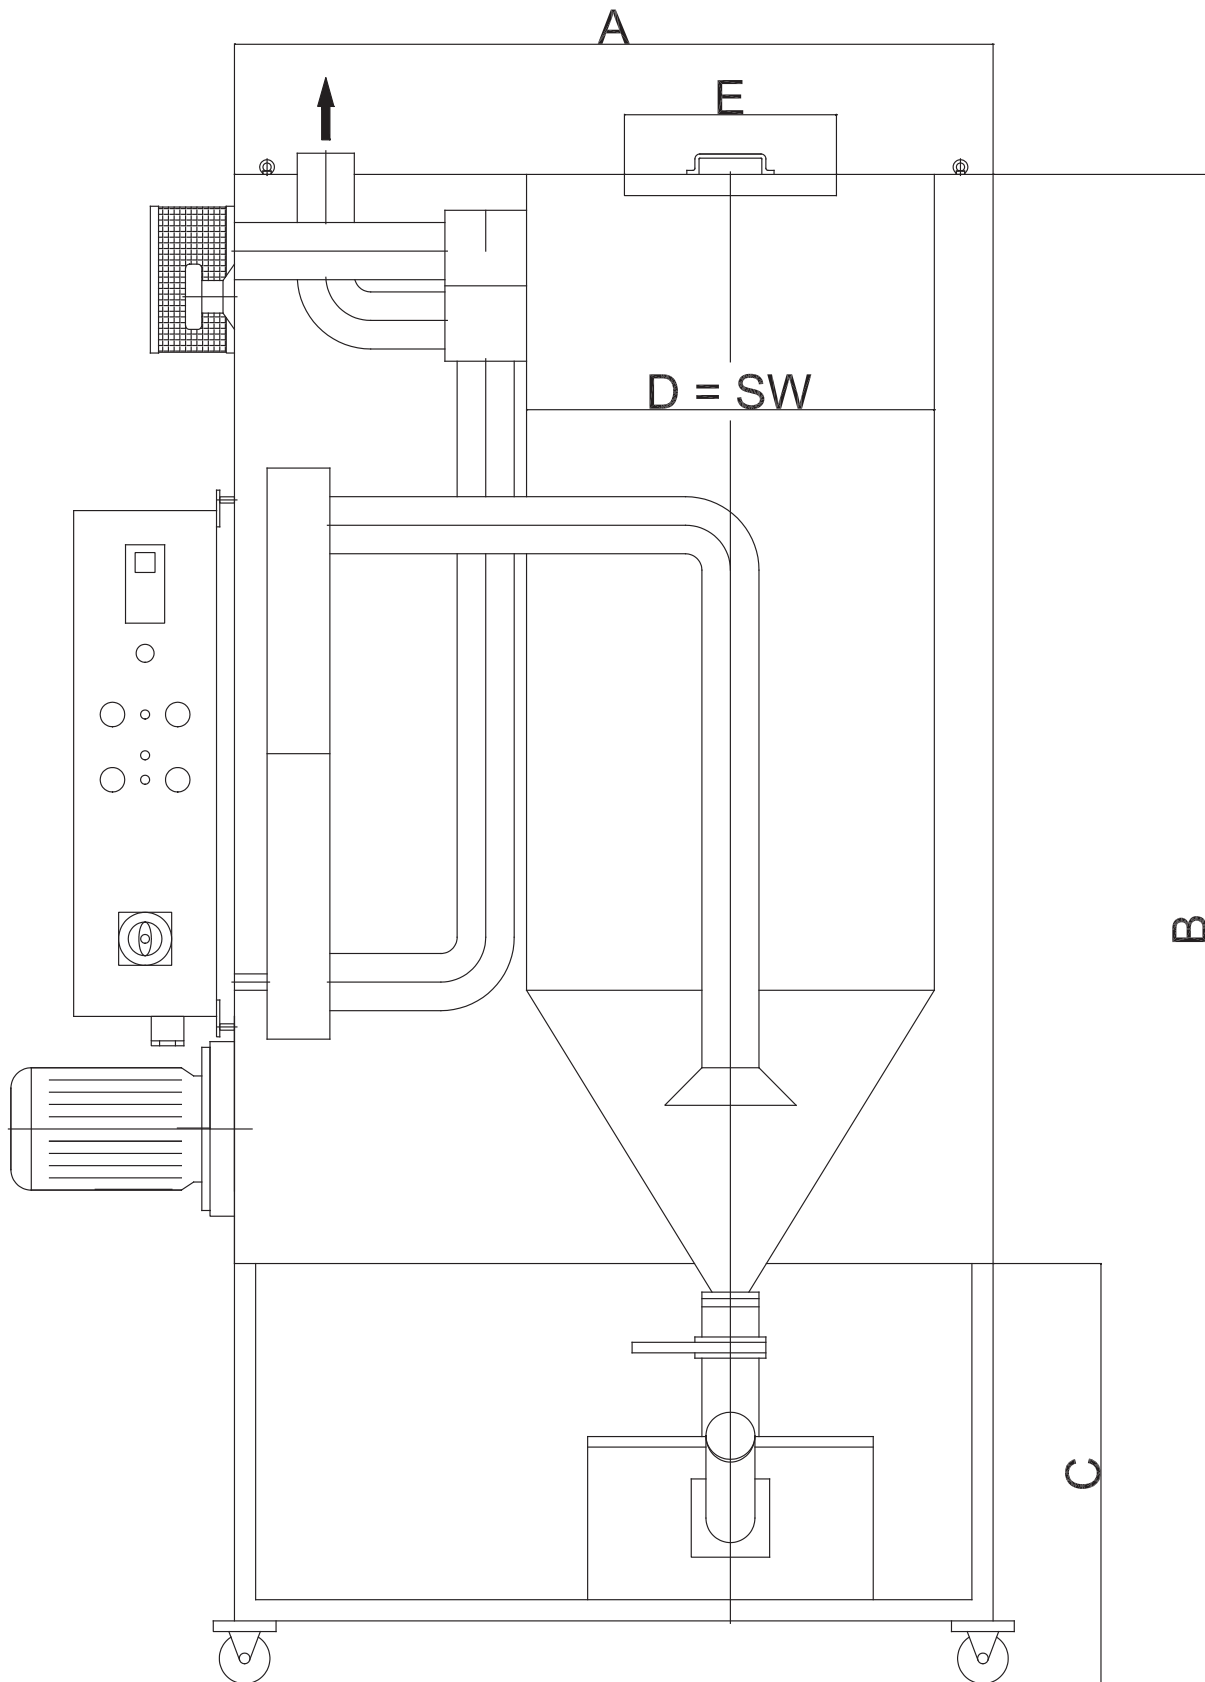

ST FR 10/19

susceptibles de modifications techniques

subject to technical change



IHNE & TESCH
ELEKTRO-WÄRMETECHNIK

KELLER IHNE + TESCH
ELEKTRO-WÄRMETECHNIK

CELTIC

KIT ELECTROHEAT

www.celtic.fr